

Using critical source areas for targeting cost-effective best management practices to mitigate phosphorus and sediment transfer at the watershed scale

P. STRAUSS¹, A. LEONE², M. N. RIPA², N. TURPIN³, J.-M. LESCOT⁴ & R. LAPLANA⁴

¹Federal Agency for Water Management, Institute for Land and Water Management Research, A-3252 Petzenkirchen, Austria,

²Department of Environment and Forests, Engineering Group, Tuscia University, via S. Camillo de Lellis, 01100 Viterbo, Italy,

³UMR Métafort, Cemagref, Campus Universitaire des Cézéaux, 24, Avenue des Landais – BP 50085, 63172 Aubiere cedex, France,

and ⁴Cemagref, ADER Research Unit, 50, Avenue de Verdun, Gazinet, 33612 Cestas cedex, France

Abstract

The impact of implementing different best management practices (BMPs) at the small watershed scale were examined for the Petzenkirchen catchment in Austria and Lake Vico in Italy, in terms of data needs, hydrological processes, tools and models involved. Identification of critical source areas for targeting soil and phosphorus losses turned out to be crucial for correct allocation of BMPs. Comparison of environmental effectiveness and costs, both calculated using various modelling approaches, enabled us to compare different levels of introducing BMPs ecologically and economically. Within each catchment, small areas of land tended to be the source of disproportionately large amounts of pollution. Therefore, confining mitigation to these areas costs less than targeting wider areas. This suggests that a policy for environmental programmes should be focussed on hydrological units and critical source areas within these units instead of introducing universal controls – the ‘watering can’ principle – as practised today.

Keywords: Best management practice, watershed, sediment, phosphorus, critical source area, cost effectiveness

Introduction

There is general agreement that agricultural activities are a major non-point source of nutrients reaching water (Novotny & Chesters, 1989; Rekolainen *et al.*, 1999; Sharpley *et al.*, 1999). This problem mainly occurs in watersheds with a high percentage of intensively managed land and associated high rates of fertilizer application. In particular, eutrophication, which is caused mainly by excessive input of nutrients (especially P) from farming activities, has been identified as the most critical problem impairing the quality of surface waters (Sharpley *et al.*, 1999). The special features of non-point source pollution make the design of mitigation policies difficult (Shortle *et al.*, 1998): the environmental agencies are faced by a wide range of potential polluters, whose individual emissions cannot be measured with accuracy at reasonable cost, and thus the allocation of the mitigation effort among the potential polluters is particularly difficult.

Agri-environment schemes are bundles of best management practices (BMPs) which are proposed by legal authorities to help farmers manage their activity in an environmentally friendly way. The programmes are recommended to farmers on a voluntary basis, offering incentives to compensate the costs of implementation. For a particular environmental concern, there may be many BMPs that could be recommended (Hilton *et al.* 2003). Regulators need to select those practices they want to support and they need to select the terms under which they are supported. As national agri-environmental schemes are currently offered on a voluntary basis in Italy, Austria and various other European countries (MAF, 1999; Italian Regional Administrations, 2000; ÖPUL 2000, 2005), farmers have to compare the advantages and disadvantages of participation and decide if the scheme would benefit them. Farmers reach their decisions by personal judgement and regulators currently use the farm level for decision making. However, the relevant scale to reach environmental goals for water quality is not the farm but the watershed scale. Here the problem arises that for different environmental pollutants, different areas within the watershed might be better suited to target

Correspondence: P. Strauss. E-mail: peter.strauss@baw.at

each hazard. Moreover, for a single pollutant different areas within a watershed will pose a different degree of risk of causing pollution. To obtain environmental effectiveness, the concept of critical source areas within watersheds has been used in various approaches (e.g. Gburek *et al.*, 2000; Heathwaite *et al.*, 2003; Bontems *et al.*, 2005a).

Costs of implementing BMPs have consequences for their actual environmental effectiveness. Farmers are less likely to adopt high-cost BMPs even though they may be the most effective. Implementation costs for particular BMPs are equally important for regulators, as they usually want to mitigate pollution at the least cost. Therefore, comparison of candidate BMPs on cost-effectiveness criteria should be an important step in the development of any agri-environmental scheme so that a trade-off between economic optimization and groundwater loadings can be arrived at (Lee, 1999, Turpin *et al.*, 2005). Heilman *et al.* (1997) suggested that voluntary programmes to improve the quality of water affected by agriculture should target the farms that have an economic incentive to adopt management systems with water quality benefits. Kraft & Toohill (1984), who used the concept of a 'representative farm' to explore the impacts of conservation practices, indicated that these practices could increase returns to management and real property, while meeting erosion standards. Lacroix *et al.* (2005) calculated the economic impacts of various anti-pollution scenarios as the difference of incomes in relation to a baseline scenario. Wossink & Osmond (2002) focussed on the economic elements driving farmer and landowner decisions in their efforts to design cost-effective programmes to improve water quality. Despite the fact that the financial support given for a specific BMP is often a strong driver for adoption, other restrictions for the adoption of proposed BMPs exist in terms of 'social acceptance' (Wu & Babcock, 1999). An integrated view of critical source areas, along with a cost-effectiveness comparison of BMPs has been worked out for nitrogen by Turpin *et al.* (2006) for a mesoscale watershed in France.

The aim of this paper was to conduct an integrated study of environmental effectiveness and implementation costs of selected BMPs at the small watershed scale. Based on the comparison of cost effectiveness at this scale, the aim was to discuss how the BMPs for agri-environmental scheme designs affects water quality and implementation costs, especially in relation to the critical source area concept. To demonstrate this, two watersheds with contrasting agronomic and environmental conditions were used.

Methods

Hydrological effectiveness

Lake Vico – general characteristics and selection of BMPs. The first study area chosen was the Lake Vico catchment, an igneous rock basin (40.8 km²), located in central

Italy. The lake, which has a surface area of 12.1 km², is located in the centre of the basin and is particularly vulnerable to eutrophication. The reasons for this vulnerability (Leone & Ripa, 1998) are that the area is young in geological terms. In fact, volcanic activity ceased in the basin only approximately 900 000 years ago and the landscape is still in an erosive phase of evolution. Furthermore, vulnerability to eutrophication factors (intrinsic), the very long hydraulic residence time (17 years), and the trend to anoxic conditions of the hypolimnion which allows the release of phosphorus from the bottom sediment of the lake. Besides the natural vulnerability of the lake, agricultural activities, especially hazelnut production, further enhance the risk of increasing phosphorus concentrations of the lake water. The drainage network in the catchment is not organized hierarchically and as a result, there are high run-off peaks, frequent occurrence of surface run-off and erosion, and destructive water action. Settlements are few and small and therefore the eutrophication problems originate from non-point source pollution (Leone & Marini, 1993). Today, the main phosphorus transport is caused by erosion in hazelnut plantations, which are kept free of ground cover. Therefore, the proposed BMP to reduce phosphorus movement into the lake is the establishment of meadows under hazelnut trees to provide crop cover to control erosion. Regulation 92/2078/CE, which was introduced in 1992, aimed at reducing the amount of fertilizer and pesticides employed but not directly at establishing meadow under hazelnut trees. Therefore, the proposed BMP can be seen as a consequence of the agricultural practices.

Monitoring system. To gain more confidence in model results, measured data were used to calibrate the hydrological models employed. The Lake Vico catchment was equipped with a meteorological station for continuous measurement of rainfall, temperature and solar radiation. Run-off was measured in a sub-basin of the catchment, the Scardenato creek (2.66 km²) using a continuous flow meter and an automatic water sampler. In addition, a hazelnut tree field (1730 m²) was equipped with a sampling unit to get information on P losses.

Delineation of critical source areas. Source factors determine the areas within catchments with a high potential to contribute P, whereas transport factors determine whether this potential is translated into P loss. We defined the areas where source factors and transport factors coexist, as being critical areas for P loss. The approach used to designate critical areas was based on the use of the field scale simulation model GLEAMS and an additional meta-model, which was derived from the application of GLEAMS. A meta-model is a simple approximation to complex simulation models (Schoumans *et al.*, 2002). GLEAMS (Knisel, 1993) is a field scale, management oriented model. The model allows evaluation of the effects of agricultural management, by providing

the quantities of nitrogen, phosphorus, sediments and pesticides that reach the edge of a field and the bottom of the root zone and are, therefore, potentially able to pollute water bodies. The model was used to evaluate sediment yield (A) and particulate phosphorus (PP), with reference both to the two scenarios with and without BMP application and to slope angle, the latter being the parameter that influences A and PP mobilization most. For each of the scenarios, we considered the mean annual values of A and PP outputs for fifty simulation years and for all the simulated slopes. In this way, a simple regression model (Leone *et al.* 2006) was built, which is the meta-model derived from the GLEAMS runs:

$$Y = aX^b \quad (1)$$

where Y is the land-use impact in terms of sediment yield or PP release, with or without the application of the BMP, in $\text{t ha}^{-1} \text{ year}^{-1}$ and $\text{kg ha}^{-1} \text{ year}^{-1}$, respectively; X is the slope; a and b are two empirically derived parameters of the regression between GLEAMS results (Y) and slope (X).

Using the meta-model, the GLEAMS results were extended to all areas of the basin on the basis of their potential contribution in terms of A and PP with and without implementation of the BMP crop cover (Ripa *et al.*, 2006).

Petzenkirchen catchment – general characteristics and selection of BMPs. Petzenkirchen is a small watershed feeding into the River Erlauf, located in the pre-alpine areas of Lower Austria. The area is mainly formed of tertiary sediments. Due to the soft parent material, the area is undulating and prone to erosion when fields are intensively cultivated. Due to the high risk of mud floods at the outlet of the Petzenkirchen catchment, retention ponds have recently been constructed. Agricultural land covers more than 90% of the catchment. The watershed drains an area of about 0.7 km^2 . Elevations range from 260 to 300 m a.s.l. with mean slopes of about 8%. Average annual rainfall is 700 mm distributed more or less evenly throughout the year. Mean annual temperature is $9.0 \text{ }^\circ\text{C}$. A typical crop rotation is winter cereal–winter cereal–maize–spring cereal. Typical farm size is 30 ha for full-time farmers (50%) and 15 ha for part-time farmers. Three BMPs were tested: conservation tillage (BMP 1), changing arable land into grassland without fertilization and only two annual cuts (BMP 2), and growing winter cereals instead of spring cereals (BMP 3). For BMP 2 two options were considered for the economic evaluation. BMP 2a describes implementation costs that are targeted only at one farm, BMP 2b was calculated using the assumption that implementation costs were applied uniformly to all farms in the catchment. These measures have been chosen because they are able to reduce erosion and associated phosphorus transport effectively (Strauss *et al.*, 2003). The advantage of BMP 3 is the dense crop cover in May when erosive rainfalls first start (Strauss *et al.*, 1995). BMPs 1 and 3 are

part of the Austrian ÖPUL programme (ÖPUL 2000, 2005), which offers contracts to farmers on a voluntary basis. Within that programme, no direct options to reduce phosphorus movement into waters exist. However, the chosen BMPs are the most effective to protect soil against soil erosion. BMP 2 was part of a former ÖPUL programme.

Monitoring system. Petzenkirchen catchment was equipped with an automatic flow recording system, a flow triggered water sampling unit and high-resolution climatic data. All necessary spatial information (soil and land use) was available at least at field scale. A Digital Elevation Model with resolution of 5 m was used to derive information about slopes and hydrological pathways.

Delineation of critical source areas. Hydrological pathways were derived by automatic delineation using the steepest descent algorithm of Jenson & Domingue (1988), implemented in a GIS. Because many hydrological active features within catchments may not be detected using flow path generation, we conducted an additional field survey to estimate actual runoff flow paths and correct the automatically derived data where necessary. We then applied the soil erosion model EUROSEM (Morgan *et al.*, 1998) to identify critical source areas of soil erosion. The model was applied assuming the ‘worst case’, i.e. all arable land was assumed to be in freshly prepared seedbed conditions. This assumption allowed routing of the water flowing between critical source areas and the water body, and identification of those areas that are most likely to deliver sediment to the water body. The identified areas were ranked according to their contribution to sediment delivery and simulations of the BMPs effectiveness were performed by increasing the area of BMP implementation according to this ranking, i.e. the areas delivering the largest amounts of sediment were the first to be treated.

Model calibration. To improve confidence in the predictive capabilities of the hydrological models employed, it was necessary to calibrate them with data that had been obtained from the catchments. EUROSEM was applied to the Petzenkirchen catchment for an extreme event in spring 2002 (Strauss & Peinitt, 2002). To use EUROSEM in a grid-based catchment area, it was necessary to use the SPIES application, a software linkage between ArcView GIS and EUROSEM (Magagna *et al.*, 2000). BMPs were then simulated by changing the values for those input parameters of the model that were affected by a particular BMP. The main changes for each BMP were to the parameters affecting soil cover.

Effectiveness assessment. The comparison of the hydrological effectiveness for the different simulated scenarios in the case study areas was carried out as:

$$E = \frac{P_0 - P_{\text{BMP}}}{P_0}, \quad (2)$$

where E is the effectiveness of the BMP considered in terms of the reduction of a particular pollutant and P_0 and P_{BMP} are the quantities of a particular pollutant produced without and with the BMP implementation, respectively.

Cost assessment. Costs were assessed with a whole farm modelling approach that simulates the agricultural land use at farm level, calculating the economic returns and the costs that would result if particular BMPs were applied. Whole farm modelling for cost calculation is suited for the case of critical areas within the watershed if the data describing farm production activities exist. As these data are usually not available at the required scale, an alternative approach is to model representative farms (Skop & Schou, 1999). Optimization runs for the representative farm show the trade-offs and abatement cost curves illustrating the relationship between economic returns of the farm and implementation of each BMP. The design of the representative farms has to be built realistically, as the cost assessment at the watershed level is an aggregation of costs obtained for these representative farms.

The representative farm is devised from regional data and local expertise, represented by only one farm type: dairy for the Petzenkirchen catchment and a hazelnut growing farm for the Lake Vico catchment. For construction of the coefficients matrix, technical data that consist of input and output flows were provided from expertise on the farming systems in the area. Ratios between outputs and inputs have been assumed constant (deterministic farm model) as well as their prices using their mean value for the current year. The bio-economic model was developed in mixed integer linear programming using GAMS software (Brooke *et al.*, 1998). Cost calculation is based on the assumption that the levels of incentive linked with a BMP in the optimal modelled solution, represents the direct costs of its implementation (Lescot, 2004). To calculate the costs for the whole catchment individual costs were summed assuming that all farms implemented the same share of their acreage with the BMP. This assumption could be changed in the case of more targeted measures covering implementation only on farms located on critical areas. Jansen *et al.* (1999) used a linear programming model to indicate the optimal spatial allocation of variants of farm management such that desired regional and sub-regional nitrate concentrations are obtained at minimum regional cost.

Results

Hydrological effectiveness

Lake Vico catchment. The monitoring period (1999–2004) was characterized by prolonged drought and very few

relevant rainfall events. In summer 2001, two run-off events occurred, generated by two short, but intense, showers with return times of about 5 and 30 years. These rains exported 5 and 18 kg ha⁻¹ of total phosphorus from the monitored hazelnut field. These events did not produce any flood in the Scardenato creek, probably due to the extreme dryness of soils in the basin and the short duration of the events.

Figure 1 shows maps of soil erosion (t ha⁻¹ year⁻¹), without (Figure 1a) and with (Figure 1b) the application of the chosen BMP as well as particulate phosphorus load (kg ha⁻¹ year⁻¹), without BMP (Figure 1c) and with BMP (Figure 1d) application. Numerical values come from the application of the meta-model (equation 1) using parameter values of Table 1.

The soil erosion methodology was tested against the USLE (Wischmeier & Smith, 1978). Results obtained were similar (Leone *et al.*, 2006), mean annual soil loss amounted to 17.5 t ha⁻¹ year⁻¹ (USLE) and 14.5 t ha⁻¹ year⁻¹ (meta-model).

However, it was more difficult to apply the USLE at basin scale because of the impact of single input factors, which were difficult to obtain. However, both approaches were congruent in their order of magnitude; they were able to explain the areas of higher risk that are located in the Northern and Eastern part of the basin and compared well with experimental data (Leone *et al.*, 2006).

These results can be considered encouraging for comparative studies of application of BMPs to critical source areas, but absolute values cannot be validated at present, as knowledge of the basin hydrology in conditions of extreme rainfall is not available. The absolute values of P loss seem to be too high (Figures 1c,d), but become more reasonable given the naturally high P content of the soils around Lake Vico. Measured data of P export from the hazelnut fields support this view. Extension of the chosen BMP to the whole critical area would result in a reduction of 80% of soil loss and 40% of P loss when compared with conventional management.

Petzenkirchen catchment. During the monitoring period (2001–2004), several severe events occurred in 2002. We used one of these events (March 2002) for the calibration of EUROSEM. Table 2 gives an overview of flow conditions, sediment load and particulate P export during the calibration event compared with mean values for the whole monitoring period.

Results presented in Table 2 reveal the strong influence of single events on sediment and P export in this catchment. It has been shown elsewhere that transport of particulate-bound phosphorus, rather than soluble phosphorus forms, dominates phosphorus transport during erosion events (Quinton *et al.*, 2003). Therefore, erosion could be taken as a surrogate for phosphorus transport in this work under the assumption that a uniform distribution of soil P status is

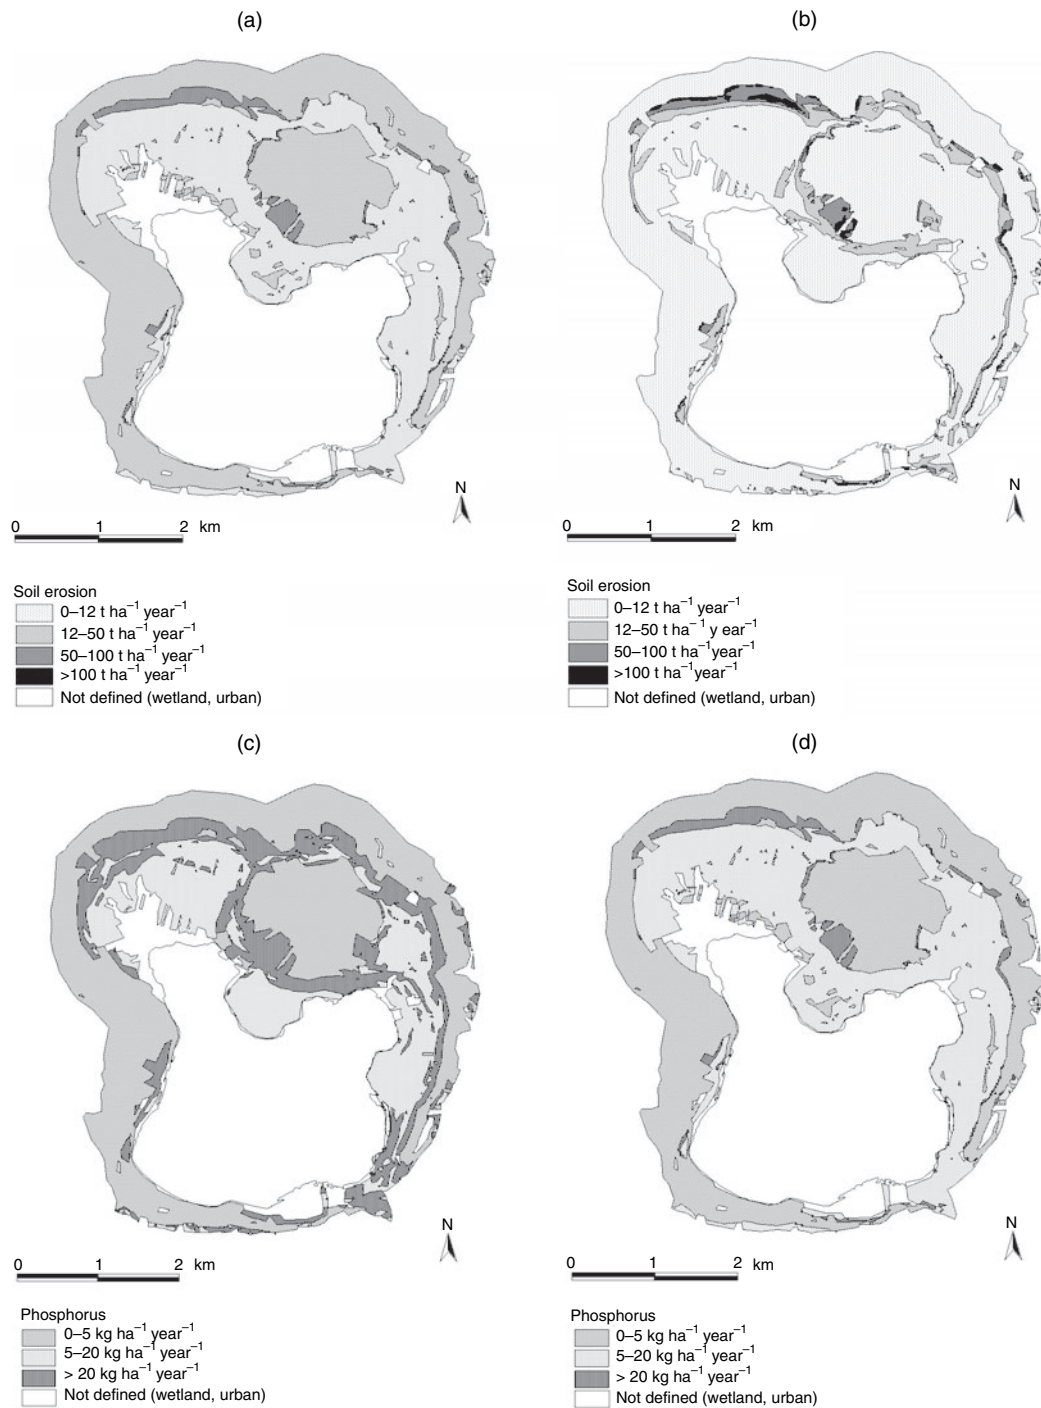


Figure 1 GLEAMS simulated soil and phosphorus yield in Lake Vico: conventional agriculture (a,c) and with BMP ‘establishment of meadows under hazelnut trees’ (b,d), adapted from Ripa *et al.* (2006).

assumed over the entire watershed. Although this was not the case, measurements of soil P contents at various sites within the catchment did not allow discrimination of phosphorus values for individual fields. Figure 2a enables identification of the main flow paths within the Petzenkirchen catchment. This was used as a basis for the ranking of criti-

cal source areas within the catchment (Figure 2b). Ranking was performed for the three most critical areas only.

After calibration, EUROSEM was applied to the Petzenkirchen catchment and for each successive simulation additional areas were assigned BMPs according to their ranking. Finally, effectiveness of BMP implementation was calculated

Table 1 Coefficients *a* and *b* in equation (1) for the meta-model at Lake Vico

<i>Y</i>	Management option	<i>a</i>	<i>b</i>
Soil erosion (t ha ⁻¹ year ⁻¹)	Conventional	287.73	1.216
	BMP	84.85	1.340
Particulate phosphorus (kg ha ⁻¹ year ⁻¹)	Conventional	26.21	0.100
	BMP	13.89	0.041

BMP, best management practice.

Table 2 Rainfall characteristics, total flow, sediment and phosphorus load for the event of March 2002, and mean annual sediment and phosphorus loads for the monitoring period 2001–2004 at Petzenkirchen catchment

Rainfall (mm)		Total flow (mm)		Sediment load (t)		Phosphorus load (kg)	
Event	Annual	Event	Annual	Event	Annual	Event	Annual
126	793	29.4	140	30.7	23.8	15	19.7

for each simulation. Figure 3 gives the change in effectiveness with increasing area of implementation for the different BMPs.

Figures 2 and 3 depict erosion as being a very localized process. Identifying risk areas and implementation of BMPs on them led to large reductions in soil loss. Only a few fields in the catchment were contributing substantially to the sediment load and targeting only 6% of the catchment produced an estimated 31–61% reduction in the total catchment sediment and hence in P load. This is in contrast to findings for other pollutants such as nitrate, where a reduction in pollution corresponds more linearly with the implementation area of BMPs (Feichtinger *et al.*, 2005). Concerning the differences between the implemented BMPs, BMP2 (permanent grassland) proved to be more effective than BMP3 (winter crops), which in turn was calculated to be more effective than BMP1 (conservation tillage).

Costs

Lake Vico catchment. In the first period after implementation of regulation 2078/92, the differences between the conventional agricultural practices and the practices complying with the regulation were very noticeable. A larger amount of fertilizer was applied in the conventional management and also there was a change in tillage system. In 1999, the regulation was replaced by the Rural Development Plan 2000–2006. This Plan also contains the proposed BMP of establishing meadows under hazelnut trees and estimates the costs for implementation at €520 ha⁻¹. This is in contrast to our calculations which suggest that the BMP could be implemented

without any additional costs because farm incomes were estimated to be €1774 ha⁻¹ with standard practices and €2012 ha⁻¹ after BMP application. Our view is supported by a recent evaluation of the management activities, which shows that already during the period of the regulation 2078/92 – with no direct subsidy for the establishment of a grass cover – a slow but noticeable change in agricultural techniques has taken place (CEC DG VI, 1998). The tillage has been reduced and it is now a common practice to allow hazelnut orchards to develop a weed cover. In addition, the use of fertilizers has been reduced to the amount suggested in the 2078/92 regulation. Nut yield was not significantly affected by these changes according to the information provided by the farmers.

Petzenkirchen catchment. When changes in practice affect only a small percentage of the total arable area of the catchment, calculations show that implementation costs are similar when BMPs are either targeted only at one farm or applied uniformly to all farms (Table 3). Nevertheless with BMPs targeted only at one farm or a few farms, implementation costs would have been higher if the BMPs had been applied to a larger part of the catchment, because marginal costs of implementation at the farm level are not constant (Table 4). However, evaluation of critical source areas has demonstrated that effectiveness is much higher when BMPs are targeted at those areas. Because costs are calculated from a representative farm, costs values are indicative. Uncertainty in the costs should be further analysed given the population of farms within the watershed. This population may not be as homogenous as assumed in our case studies. When the costs per unit of reduction in loss of P are compared, BMP 3 (conservation tillage) was the most effective and BMP 2 (permanent grassland) the least effective BMP (Table 3).

The costs calculated by modelling turned out to be close to the compensations proposed by the Austrian agri-environmental programme ÖPUL 2000 (BMLFUW, 2000) for these BMPs. Nevertheless, an analysis of results shows that when the BMP involve a change of crop (like BMP2 grassland), the amount of compensation per hectare needed to make the changes profitable varies from farm to farm (Lescot, 2004; Feichtinger *et al.*, 2005). Thus, a mechanism with a set incentive per hectare may result in limited uptake. Unfortunately, most agri-environmental programmes offer a fixed compensation per hectare irrespective of the total area covered by the BMP.

Discussion

Results of the environmental effectiveness calculations demonstrate that for the conditions prevailing in both catchments erosion and phosphorus loss may be decreased effectively by addressing critical source areas, which cover

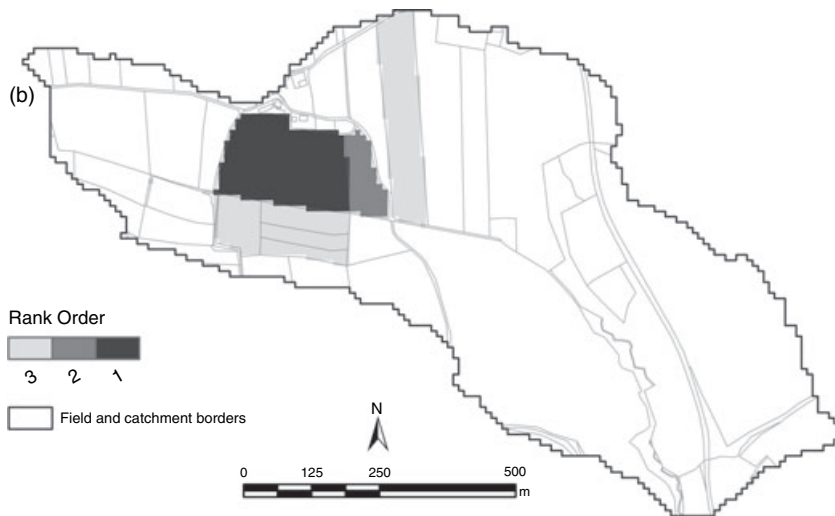
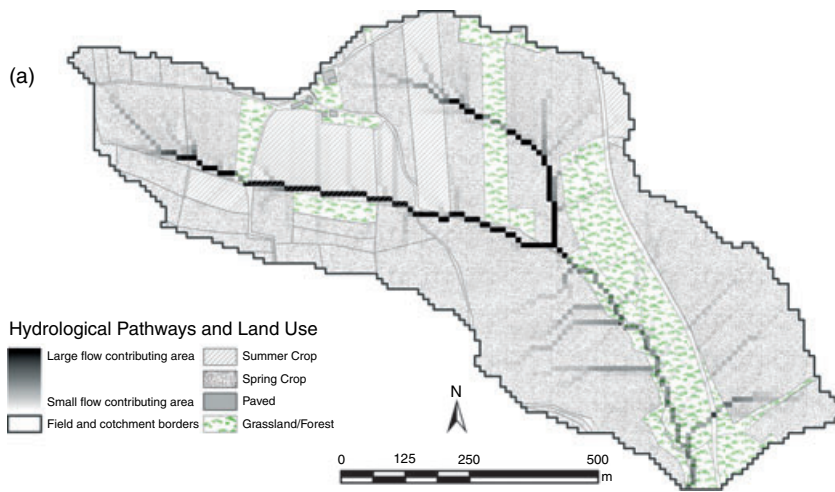


Figure 2 (a) Identification of hydrological pathways and land use in 2002 in the Petzenkirchen catchment. (b) Ranking of critical source areas within the Petzenkirchen catchment according to their risk of soil loss (1 = highest risk).

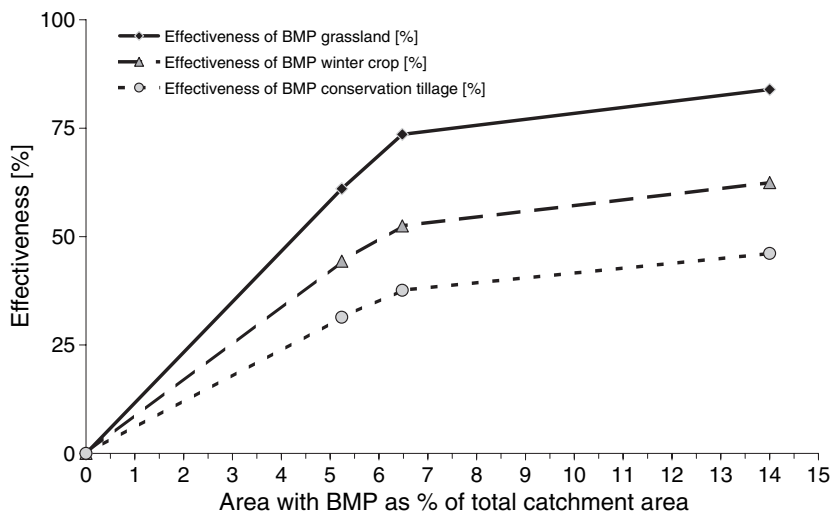


Figure 3 Effectiveness of implementing best management practices in the Petzenkirchen catchment.

only a relatively small area of those catchments. Making these results acceptable in practice would, however, need tools that could provide satisfactory outcomes for both pol-

icy makers and farmers at a scale larger than the tested catchments. Models with different degrees of detail could be one possibility due to the given constraints in data

Table 3 Effectiveness and associated costs of the different best management practices (BMP) at various levels of implementation in the Petzenkirchen catchment

Area implemented (%)		Effectiveness (%)			Costs (€)			
Total area	Total arable area	BMP 1	BMP 2	BMP 3	BMP 1	BMP 2a	BMP 2b	BMP 3
5.2	6.1	31	61	44	377	1111	1111	374
6.5	7.7	38	74	52	467	1374	1374	462
14	16.5	46	84	62	1008	2969	2989	999

BMP 1, conservation tillage; BMP 2, grassland instead of arable land; BMP 2a, grassland on every farm; BMP 2b, grassland on one farm; BMP 3, winter cereals instead of spring cereals.

Table 4 Cost of implementation of Best Management Practice 2 (unfertilized grassland) for the representative farm in the Petzenkirchen catchment

Area implemented (% of arable land)	Costs (€ ha ⁻¹)
5–42	321
43–50	334
51–54	354
55–87	442
88–90	912
91–97	941
97–98	1030
99–100	1188

availability (Heathwaite *et al.*, 2005). In fact, the approaches tested here can also be seen as nested in the sense that identification of critical source areas was performed using a simple procedure of routing water through a catchment, whereas a detailed analysis of cost effectiveness for the identified critical source areas was based on more detailed techniques. In the case of the Petzenkirchen catchment, the chosen approach claimed to be 'process based'. Theoretically, it would therefore be easier to apply it at least to neighbouring catchments or for similar environmental conditions. Due to temporal and spatial constraints, the chosen approach is clearly suited only for small watersheds. However, these are the catchments where hydrological connectivity between pollution source and water channel is usually high. Because of its simplicity, the approach chosen for Lake Vico seems at first sight better suited for application at larger scales. However, as the meta-model has been derived empirically only for Lake Vico catchment, it would need re-parameterization for application to other sites. This is especially the case in situations where factors other than slope are dominating transport into the aquatic system.

When choosing between BMPs at the Petzenkirchen catchment, there is a trade-off between costs and environmental

effect, exemplified with BMP 3 and BMP 2: the environmental benefit of BMP 2 is the greatest, but it costs more. The question is which of these BMPs should be chosen? Although BMP 3 has the best cost-effectiveness ratio, BMP 2 may be still a suitable candidate if BMP 3 falls short of the environmental objective or if the receptor water body is particularly valuable in terms of recreation benefits. Therefore, there are several different options available to reach a desired environmental goal, and the advantage of applying the described methodology is that farmers may be offered a set of options rather than a single solution. This flexibility may increase uptake of BMPs and benefit the overall environmental benefit. In practical terms, this suggests that the concept of critical source area should be an integral part of contract menus dealing with phosphorus and soil loss measures (see Bontems *et al.*, 2005a for an example of such a contract menu).

The main results of the GLEAMS and meta-model application to the Lake Vico basin suggest that:

- (1) it is feasible to spread to the catchment scale the detail of the field scale which is fundamental to BMP evaluation;
- (2) to zone landscape by critical areas, related to the main environmental processes of interest, soil erosion and phosphorus mobilization in this case is the fundamental tool to understand where the real impacts are located, and how much they could be reduced by BMP application.

As a consequence of (2), zoning landscape by BMP effectiveness results in improved management information. Untargeted implementation of a particular BMP provides the same financial support to all farmers irrespective of whether they are generating real impacts, while the proposed targeted support allows better use of resources, increasing or reducing them on the basis of environmental impact. Although the meta-model is a simple equation, it performs well by summarizing all the factors of the complex environmental and anthropogenic system that is an integral part of the GLEAMS model.

It must be recognized that even the most sophisticated of models remains only a simplified and idealized abstraction of the real system, necessarily including only a selection of the relevant elements and processes while neglecting others. The adopted modelling approach, inevitably introduces a lot of uncertainty resulting from the type of model, input parameter errors, but also from intrinsic, chaotic behaviour of the actual system. However, it is not clear that large, over parameterized, deterministic models can do a satisfactory job, because it is almost impossible to validate them (Heathwaite, 2003).

For these reasons, we did not implement simulation models as tools to reach the unattainable goal of absolute predictions, but rather as tools that help to assess the relative environmental effectiveness of 'alternative' agricultural practices and to evaluate land processes, while taking into account the complex man-environment interactions. It is in these terms that we can expect simulation models to

improve the process of land management oriented to water protection.

Conclusions

The aim of this study was to compare environmental and economical effectiveness of particular BMPs in two small catchments subject to erosion and P loss. Results achieved suggest that for the considered pollutants a two-step procedure of first evaluation of critical source areas followed by application of simulation models would enable policy makers to allocate monetary resources in an efficient way. However, environmental effectiveness is only one of several priorities of agricultural policy.

In addition, whereas the levels of BMP implementation for policy are the administrative unit, this study has shown that hydrological units would be better suited – at least for the pollutants investigated. Finally, the comparison between environmental effectiveness and economic evaluation introduces the possibility of comparing the cost effectiveness of different management practices.

Acknowledgements

This paper was written as a part of the project ‘Systems approach to environmentally acceptable farming’ (AgriBMP-water EVK1-CT-1999-00025) which has been funded by the European Union. We are grateful to Paul Withers, Phil Haygarth, Bryan Davies and two more unknown reviewers for helping us to improve content, style and grammar of the paper.

References

- Bontems, P., Rotillon, G. & Turpin, N. 2005a. Self-selecting agri-environmental policies with an application to the Don watershed. *Environmental and Resource Economics*, **31**, 275–301.
- Brooke, A., Kendrick, D., Meeraus, A. & Raman, R. 1998. *GAMS user's guide*. GAMS Development Corporation, 1217 Potomac Street, N.W., Washington, DC. Available at: <http://www.gams.com/>; accessed 1/6/2007.
- CEC DG VI, 1998. *Evaluation of agri-environment programmes*. State of Application of Regulation (EEC) No. 2078/92, Working Document VI/7655/98, European Commission. Available at http://ec.europa.eu/agriculture/envir/programs/index_en.htm; accessed 1/6/2007.
- Feichtinger, F., Strauss, P., Lescot, J.M., Kaljonen, M. & Hofmacher, G. 2005. Integrated assessment of groundwater protection against nitrate pollution using environment-friendly agricultural practices. In: *International Conference 'Multifunctionality of Landscapes – Analysis, Evaluation, and Decision Support', Book of Abstracts, Justus-Liebig University Giessen, Germany, May 18–19, 87*.
- Gburek, W.J., Sharpley, A.N., Heathwaite, L. & Folmar, G.J. 2000. Phosphorus management at the watershed scale: a modification of the phosphorus index. *Journal of Environmental Quality*, **29**, 130–144.
- Heathwaite, A.L. 2003. Making process-based knowledge useable at the operational level: a framework for modelling diffuse pollution from agricultural land. *Environmental Modelling and Software*, **18**, 753–760.
- Heathwaite, A.L., Fraser, A.I., Johnes, P.J., Hutchins, M., Lord, E. & Butterfield, D. 2003. The Phosphorus Indicators Tool: a simple model of diffuse P loss from agricultural land to water. *Soil Use and Management*, **19**, 1–11.
- Heathwaite, A.L., Dils, R.M., Liu, S., Carvalho, L., Brazier, R.E., Pope, L., Hughes, M., Phillips, G. & May, L. 2005. A tiered risk-based approach for predicting diffuse and point source phosphorus losses in agricultural areas. *Science of the Total Environment*, **344**, 225–239.
- Heilman, P., Yakowitz, D.S. & Lane, L.J. 1997. Targeting farms to improve water quality. *Applied Mathematics and Computation*, **83**, 173–194.
- Hilton, J., Hornby, D. & Moy, I. 2003. Reducing Diffuse Pollution to Rivers: A Protocol for Identifying Best Management Practices. *Conserving Natura 2000 Rivers Conservation Techniques Series No. 11*, English Nature, Peterborough.
- Italian Regional Administrations. 2000. Based on EU Regulation 1257/1999, Council of the European Union, Official Journal, L160/80, Rabat, 2–6 February. 1998, 573–580.
- Jansen, D.M., Buijze, S.T. & Boogaard, H.L. 1999. Ex-ante assessment of costs for reducing nitrate leaching from agriculture-dominated regions. *Environmental Modelling and Software*, **14**, 549–565.
- Jenson, S.K. & Domingue, J.O. 1988. Extracting topographic structure from digital elevation data for geographic information system analysis. *Photogrammetric Engineering and Remote Sensing*, **54**, 1593–1600.
- Knisel, W.G. (Ed.) 1993. *GLEAMS – groundwater leaching effects of agricultural management systems*. Version 3.10. Coastal Plain Experimental Station, University of Georgia, Tifton, GA.
- Kraft, S.E. & Toohill, T.L. 1984. Soil degradation and land use changes: a representative-farm analysis. *Journal of Soil and Water Conservation*, **39**, 334–338.
- Lacroix, A., Beaudoin, N. & Makowski, D. 2005. Agricultural water nonpoint pollution control under uncertainty and climate variability. *Ecological Economics*, **53**, 115–127.
- Lee, L.K. 1999. Groundwater quality and farm income: what have we learned. *Review of Agricultural Economics*, **20**, 168–185.
- Leone, A. & Marini, R. 1993. Assessment and mitigation of the effects of land use in a lake basin (Lake Vico in Central Italy). *Journal of Environmental Management*, **39**, 39–50.
- Leone, A. & Ripa, M.N. 1998. Land use time evolution for the sustainability of agriculture in the Lake Vico basin (Central Italy). In: *Proceedings of C.L.G.R.* (International Commission of Agricultural Engineering), Rabat, 2–6 February. 1998, 573–580.
- Leone, A., Ripa, M.N., Garnier, M. & Lo Porto, A. 2006. Agricultural land use and best management practices to control nonpoint pollution. *Environmental Management*, **38**, 253–266.
- Lescot, J.M. 2004. Decision support for cost-efficient environmental management of small watersheds: How to deal with the costs of agricultural best management practices. In: Cristovao, A., (ed): *PreProceedings of the 6th European Symposium of the International Farming Systems Association, Vila Real, Portugal, 3–8 April, 7*.

- MAF, 1999. *Ehdotus maatalouden ympäristöohjelmaksi 2000–2006 [The proposal for Finnish agri-environmental Programme 2000–2006]*. Ministry of Agriculture and Forestry, Helsinki.
- Magagna, B., Folly, A., Hönniger, K., Muhar, A., Quinton, J., Sancho, F. & Strauss, P. 2000. The SPIES model: data flow and linkage between a soil erosion and a soil productivity model. In: (ed. K. Fullerton), *Proceedings of the Fifth EC-GIS Workshop, EUR 19018 EN* pp. 259–269. Joint Research Centre, Ispra.
- Morgan, R.P.C., Quinton, J.N., Smith, R.E., Govers, G., Poesen, J.W.A., Auerswald, K., Chisci, G., Torri, D. & Styczen, M.E. 1998. The European soil erosion model (EUROSEM): a process-based approach for predicting sediment transport from fields and small catchments. *Earth Surface Processes and Landforms*, **23**, 527–544.
- Novotny, V. & Chesters, G. 1989. Delivery of sediment and pollutants from nonpoint sources: a water quality perspective. *Journal of Soil and Water Conservation*, **6**, 568–576.
- ÖPUL 2000, 2005. *Sonderrichtlinie für das Österreichische Programm zur Förderung einer umweltgerechten, extensiven und den natürlichen Lebensraum schützenden Landwirtschaft*. Bundesministerium für Land- und Forstwirtschaft, Umwelt und Wasserwirtschaft, BMLFUW-LE.1.1.8/0015-II/8/2005, Wien.
- Quinton, J.N., Strauss, P., Miller, N., Azazoglu, E., Yli-Halla, M. & Uusitalo, R. 2003. The potential for soil phosphorus tests to predict phosphorus losses in overland flow. *Journal of Plant Nutrition and Soil Science*, **166**, 432–437.
- Rekolainen, S., Grönroos, J., Bärlund, I., Nikander, A. & Laine, Y. 1999. Modelling the impacts of management practices on agricultural phosphorus losses to surface waters of Finland. *Water Science and Technology*, **39**, 265–272.
- Ripa, M.N., Leone, A., Garnier, M. & Lo Porto, A. 2006. Agricultural land use and best management practices to control nonpoint water pollution. *Environmental Management*, **38**, 253–266.
- Schoumans, O.F., Mol-Dijkstra, J., Akkermans, L.M.W. & Roest, C.W.J. 2002. Assessment of non-point phosphorus pollution from agricultural land to surface waters by means of a new methodology. *Water Science and Technology*, **45**, 177–182.
- Sharpley, A.N., Gburek, W.J., Folmar, G. & Pionke, H.B. 1999. Sources of phosphorus exported from an agricultural watershed in Pennsylvania. *Agricultural Water Management*, **41**, 77–89.
- Shortle, J.S., Horan, R.D. & Abler, D.A. 1998. Research issues in non-point pollution control. *Environmental and Resource Economics*, **11**, 571–585.
- Skop, E. & Schou, J.S. 1999. Modeling the effects of agricultural production. An integrated economic and environmental analysis using farm account statistics and GIS. *Ecological Economics*, **29**, 427–442.
- Strauss, P. & Peinsitt, A. 2002. Die erosiven Niederschläge des März 2002 und ihre Folgen in zwei landwirtschaftlich genutzten Kleinzugsgebieten. Tagungsband ALVA.
- Strauss, P., Auerswald, K., Blum, W.E.H. & Klaghofer, E. 1995. Erosivität von Niederschlägen. Ein Vergleich Österreich – Bayern. *Z.f. Kulturtechnik und Landentwicklung*, **36**, 304–309.
- Strauss, P., Swoboda, D. & Blum, W.E.H. 2003. How effective is mulching and minimum tillage to control runoff and soil loss. Proceedings of “25 Years of Assessment of Erosion, Ghent, 22–26 September 2003, 545–550.
- Turpin, N., Bontems, P., Rotillon, G., Barlund, I., Kaljonen, M., Tattari, S., Feichtinger, F., Strauss, P., Haverkamp, R., Garnier, M., Porto, A.L., Benigni, G., Leone, A., Ripa, M.N., Eklo, O.M., Romstad, E., Bordenave, P., Bioteau, T., Birgand, F., Laplana, R., Lescot, J.M., Piet, L. & Zahm, F. 2005. AgriBMPWater: systems approach to environmentally acceptable farming. *Environmental Modelling and Software*, **20**, 187–196.
- Turpin, N., Laplana, R., Strauss, P., Kaljonen, M., Zahm, F. & Bégué, V. 2006. Assessing the cost, effectiveness and acceptability of best management farming practices: a pluridisciplinary approach. *International Journal of Agricultural Resources, Governance and Ecology* **5**, 272–288.
- Wischmeier, W.H. & Smith, D.D. 1978. Predicting rainfall erosion losses – a guide to conservation planning. US Department of Agriculture. Agriculture Handbook No. 537, Washington, DC.
- Wossink, G.A.A. & Osmond, D.L. 2002. Farm economics to support the design of cost-effective best management practice (BMP) programs to improve water quality: nitrogen control in the Neuse River Basin, North Carolina. *Journal of Soil and Water Conservation* **57**, 213–220.
- Wu, J. & Babcock, B.A. 1999. The relative efficiency of voluntary versus mandatory environmental regulations. *Journal of Environmental Economics and Management*, **38**, 158–175.